

Remove Dissolved Water from Transformer Oil

Reduce Moisture in Transformer Oil to <10 ppm Without Heat & Vacuum

DESCRIPTION

Dissolved water removal from insulating oil is now possible without the need for heat and vacuum oil processing systems. Specifically developed for dehydrating oil to be used in transformers, patented* **Superdri** cartridges can help utilities reduce expenses and increase efficiency when processing oil.

FEATURES

- **Unique Construction** – Specifically designed for transformer oil dehydration.
- **High Capacity** – Process up to 5,000 gallons of oil or more with a single cartridge.
- **Efficient** – Single pass water removal to less than 10 ppm total water, or better.
- **Versatile** – Models available to fit most industry standard housings.
- **Safe** – Will not remove oxidation inhibitors.
- **Cost Effective** – Process transformer oil for less than 5¢ per gallon.

SPECIAL CONSIDERATIONS

Superdri cartridges are not designed for particulate removal. Prefiltering through Velcon 1/2 micron elements is recommended if particle contamination is suspected. **Superdri** cartridges are not recommended for cost effective removal of free water in insulating oil. If free water is suspected, the oil should be prefiltered using Velcon **Aquacon**[®] elements.




Models SD-718, SD-807, and SD-1107, respectively.

APPLICATIONS

- Superdri** cartridges are designed for oil processing situations where dissolved water in insulating oil is a concern, and its removal is desirable. Examples of these situations follow:
- New distribution and EHV transformers are typically oil-filled under vacuum. If the insulating oil has a high total water content, it is also processed through a heat and vacuum system. **Superdri** cartridges can be used instead of heat and vacuum to dry the oil.
 - Repaired transformers are often oil filled under vacuum. Flowing the oil through **Superdri** cartridges eliminates the need to vacuum process the oil.
 - Insulating oil in storage tanks, and tankers of oil that have accumulated a high level of dissolved water can be recirculated and dried to less than 10 ppm total water using **Superdri** cartridges.
 - Use **Superdri** cartridges for processing oil in other high voltage apparatus that is sensitive to dissolved water.
 - Use **Superdri** cartridges to help meet processing specifications where dissolved water sensitive dielectric breakdown voltage test ASTM D-1816 is used, or required.


* U.S. Patent No. 5,574,214

CHART A

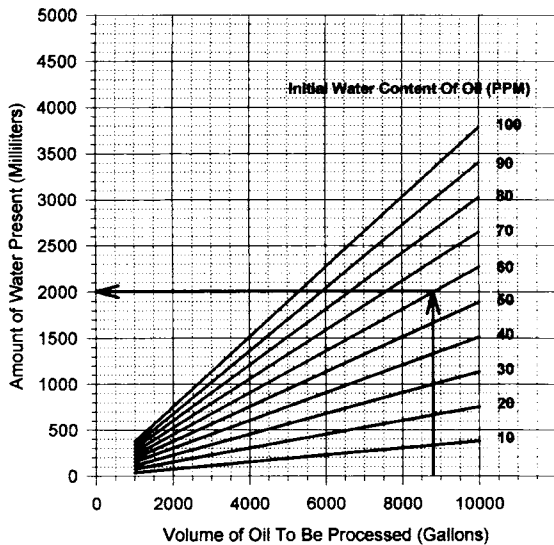

Example: You have 8800 gallons of oil to process with an initial water content of 60 ppm. Find 8800 gallons on the horizontal scale, and follow up until you intersect the 60 ppm line. Read across to find the total amount of water on the vertical scale.

CHART B

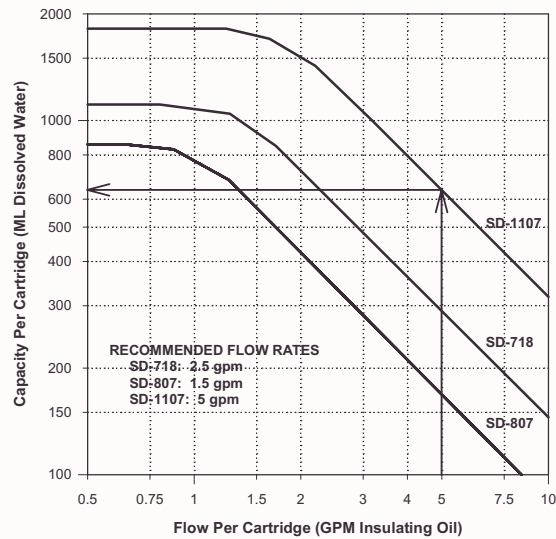

Example: You are filling at 5 gpm per cartridge through SD-1107 cartridges. Follow up from 5 gpm on the horizontal scale until you intersect the SD-1107 line. Read across to find the amount of water one cartridge will remove.

Superdri® cartridges are easy to use:

1. Using Chart (A) above, determine amount of water in oil.
2. Using Chart (B) above, determine amount of water a single cartridge will remove.
3. Divide results from (1) by results from (2):

$$\frac{2000 \text{ ml to be removed}}{620 \text{ ml capacity}} = 3.2 \text{ cartridges required}$$

Unlike ordinary filters, **Superdri** cartridges cannot be monitored for capacity or performance by differential pressure. Regular effluent samples must be taken and analyzed with a Karl Fischer titrator, such as the Aquapal®, to monitor the cartridges' effectiveness. In-line moisture sensors such as Doble Domino can also be used to monitor cartridge performance. Without availability of this equipment, the user can estimate cartridge life from the above charts.

Superdri cartridges will not remove dissolved gases, nor are they recommended for use on badly deteriorated or arced oil.

ORDERING INFORMATION

Part Number	Fits These Housings
SD-718	Velcon VF-7, VF-8 Series, Hilco 718 Style
SD-807	Velcon VF-10, VF-12 Series, Cuno PT1 Style, Alsop
SD-1107	Velcon VF-12 Series, Cuno PT1 Style, Alsop

NOTE: Install **Superdri** cartridges vertically.

Aquapal is a registered Trademark of CSC Scientific Company, Inc.



Velcon products are sold and serviced by a world-wide representative network. To order, contact Headquarters or your **LOCAL REPRESENTATIVE:**

COMPANY HEADQUARTERS:
 Velcon Filters, Inc.
 1210 Garden of the Gods Road
 Colorado Springs, CO 80907-3410
 Phone: 1.800.531.0180 / 1.719.531.5855
 Fax: 719.531.5690
 e-mail: vfsales@velcon.com
 www.velcon.com

MANUFACTURING PLANTS LOCATED AT:
 Colorado Springs, Colorado
 Sylacauga, Alabama

OVERSEAS AFFILIATES:
 Frankfurt/M., Germany & Singapore

**Liquid Filtration
 and Separation
 Specialists**